

## LOCATION & REMOVAL

Firstly to determine if your PCM unit is compatible, press and hold the MAIN & TRIP buttons to display the PCM Software version. Should be 2.0 or above

Installation is made at the front unit.

To remove the head unit you will need to remove the surrounding trim then the 4 screws securing the unit, as below. Some models are removed with specific radio keys.



TOOKI-POR is designed to work with a radio that has a factory SIM card based GSM phone option rather than Bluetooth. As such, certain functions displayed on the radio are not supported by the TOOKI-POR.


**The factory phone module (if fitted) will need to be removed from its power and optical connection (optical cables must be re-connected to continue loop) This module is located under the drivers (O/S) seat on all models. It is possible to install the TOOKI kit at the Factory phone location and allocate 12v+ perm and ground.**

## INSTALLATION

With the head unit now removed locate the power ISO plug and the Black optical plug shown below.



Insert OPTICAL leads into TOOKI-POR loom and car loom to create loop, see diagram below

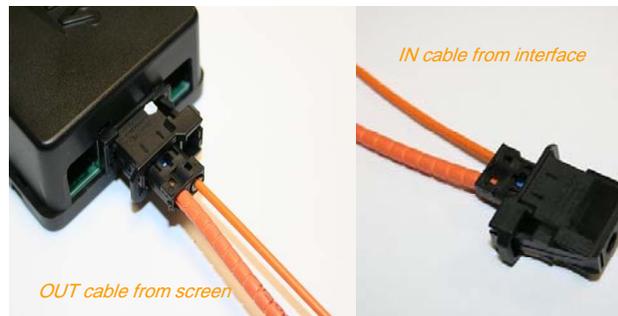

INTERFACE

CAR CONNECTOR

To remove the (out) fibre optic cable from the factory connector you will need to remove the black outer casing and push out the blue locking insert. You will need to do the same to insert the cable into the supplied loom. (shown in previous fig)

Next plug in the power link loom into the car harness, plug in the microphone (supplied) and insert optical plug into the interface.

## OPERATING INSTRUCTIONS

1. Press **TEL** on PCM Radio.
2. **"Tooki Searching"** indicates no phone connected.
3. Start the pairing procedure on your mobile phone. Make sure the Bluetooth feature is turned on. Consult your phone's manual for phone-specific pairing procedures.
4. Once your mobile phone discovers **Tooki xxxx** (last 4 digits will vary), select and pair **Tooki**.
5. When prompted for a passkey, enter **6888** on your mobile phone.
6. Once pairing is complete, press **TEL** and select **"phonebook"** Choose the phone you wish to pair, and select. After a short while you should see your signal strength indicator and phone book list on the PCM Radio. Pressing "Tel" will then show you your network provider and signal strength.
7. You may pair up to 5 different mobile phones. For information on phone selection, section 6
8. To delete a paired phone select phone book, scroll to the phone name you wish to delete, select the name by pushing the rotary button. When the name is selected scroll to **"delete"** on screen and you should see the message "are you sure you want to delete" select yes.
9. you may use any of the units hard keys as well as the on screen lists to dial out.

# OPERATING INSTRUCTIONS

The TOOKI-POR is designed for a phone ready PORSCHE vehicle, When used properly, the TOOKI-POR establishes a wireless Bluetooth link between the Porsche PCM radio and your mobile phone.

With key features such as Phone book synchronization (phone dependent), Privacy mode, Radio keypad dial / call / hang-up, and noise-cancelling technology,



## NAV TV (Europe) LTD

Distribution Centre  
Unit 21B Vale Business Park  
Llandow, Vale of Glamorgan  
CF71 7PF

Telephone: + 44 (0)8445 783 783  
Fax: + 44 (0)1446 77 22 47  
technical@nav.tv

# TOOKI-POR

**BLUETOOTH PHONE CONNECTION**  
**ALL PORSCHE equipped with PCM2**  
**(SW version 2.0 and above)**

NAV TV (Europe) LTD

**Disclaimer**  
NAV TV (Europe) Ltd is not liable for any incidental, consequential or indirect damages. In case of erratic behavior of the vehicle's electrical system please disconnect the NAV TV product and contact our technical support Team. NAV TV (Europe) Ltd does not assume liability for any diagnostic fees.

**e11\*72/245\*2004/104\*4020\*00**  
**RoHS 2002/95/EC—2002/96/EC**